

Intec-G2® Series



POWER & CONTROL





EXPERIENCE & QUALITY



TECHNOLOGY & INNOVATION



A GMM Group Company

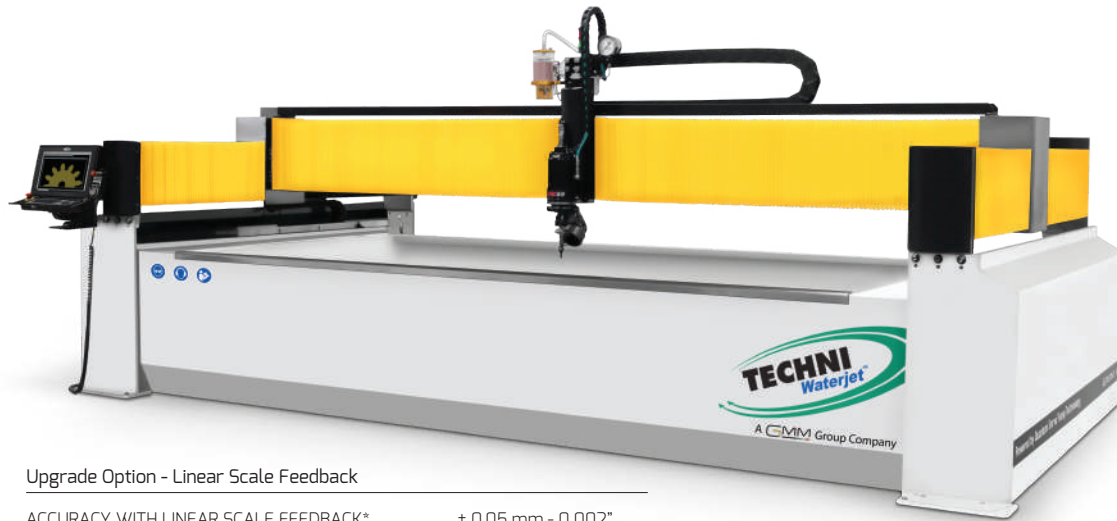

Upgrade Option - Linear Scale Feedback

ACCURACY WITH LINEAR SCALE FEEDBACK*	± 0,05 mm - 0,002"
REPEATAB. WITH LINEAR SCALE FEEDBACK*	± 0,025 mm - 0,001"

TECHNICAL DATA

MODULE	i1020-G2
MACHINE SIZE (L x W x H) Does not include pumps or control cabinet	8000 x 4200 x 2000 mm 315" x 165,3" x 78,7"
MACHINE WEIGHT	7170 kg - 15800 lb
MACHINE WEIGHT (with water)	21920 kg - 48330 lb
CUTTING TABLE DIMENSION	3200 x 6250 mm 126" x 246"
CUTTING AREA (without PAC60)	3050 x 6100 mm 120" x 240"
BEVEL CUTTING AREA (with PAC60)	2730 x 5800 mm 107,5" x 228,3"
CUTTING AREA MAXIMIZED (with PAC60)	3030 x 6100 mm 119,2" x 240"
ACCURACY OF MOTION*	± 0,15 mm/m - 0,006"
REPEATABILITY OF MOTION*	± 0,05 mm - 0,002"
MAX. AIR SPEED	17,5 m/min - 700 in/min
MAX. CUTTING SPEED	17,5 m/min - 700 in/min
MAX. MATERIAL THICKNESS (with PAC60)	200 mm - 8" (200 mm - 8")

IMPORTANT NOTICE: the technical data is not binding and may be changed by Techni Waterjet without prior notice. All the above accuracy tolerances are correct at the calibration temperature of 20° ± 1° C.

*Linear/Axis/Meter

Machines displayed in the present catalogue are without safety barriers in order to ensure the perfect vision of all the details of the machine.

Intec-G2® 1020

HIGH-PRESSURE WATERJET SYSTEMS

STANDARD FEATURES

BREAK AWAY HEAD



Should the cutting head inadvertently crash into a clamp/fixture, hit the edge of a work piece or an upturned part, the Break Away Head will detect the crash and automatically stop the machine.

Not available with PAC60.

SERVO Z AXIS



Servo Z axis with auto height position recall, laser terrain mapping (optional) and edge location optics.

WATER RAISE AND LOWER



Automatic water Raise/Lower at the push of a button for quieter, cleaner and safer submerged cutting; our tanks include air-tight welds of an air chamber which uses regular shop air pressure.

TECH-SENSE



Tech-Sense Monitoring System enables true unattended operations. Should the cutting be disrupted the machine will pause the program and send a text message to your cell phone (SMS Notification option must be fitted.)

ABRASIVE PUMP AND HOPPER



The hopper includes a clear pump chamber to ensure abrasive is present and flowing correctly. Here is where the abrasive is pressurized, allowing the lid to be opened at any time.

Standard 500 Kg / Optional 2000 Kg

REMOTE CONTROL PENDANT



The MPG allows to manually wind forward or backward through a cutting path. This enables the operator to find the exact point along a cutting path from which to re-start cutting after a stoppage, or to simply locate a pre-cut part.

ELECTRIC SERVO PUMP - Patented

Quantum™

The Quantum™ pump incorporates core "direct servo" technology that was first applied by NASA for the Space Shuttle Program.



ESP 37/66

MAX OUTPUT PRESSURE 4550 bar (66,000 psi)
MAX OUTPUT VOLUME 3.8 l/min (1.0 gpm)
Output Volume Based on 480 VAC Electrical Supply

BENEFITS

- 60% more efficient than hydraulic intensifier
- Designed for quick seal service
- Virtually silent with noise level of 70 dbA



UL 40/6000

MAX OUTPUT PRESSURE 6000 bar (88,000 psi)
MAX OUTPUT VOLUME 3.0 l/min (0.8 gpm)
Output Volume Based on 480 VAC Electrical Supply

TECH-SENSE



Tech-Sense Monitoring System enables true unattended operations. Should the cutting be disrupted the machine will pause the program and send a text message to your cell phone (SMS Notification option must be fitted.)

ABRASIVE PUMP AND HOPPER



The hopper includes a clear pump chamber to ensure abrasive is present and flowing correctly. Here is where the abrasive is pressurized, allowing the lid to be opened at any time.

Standard 500 Kg / Optional 2000 Kg

REMOTE CONTROL PENDANT



The MPG allows to manually wind forward or backward through a cutting path. This enables the operator to find the exact point along a cutting path from which to re-start cutting after a stoppage, or to simply locate a pre-cut part.

PAC60 - Patented

The PAC 60™ operating software incorporates the True Cut® algorithms data base, developed to determine the predicted taper at a given surface finish. This taper is then compensated for when cutting the part, anywhere from 0 to 60 degrees, giving you "Precision Angle Control" of any part that can be produced on an X-Y abrasive waterjet cutting machine.



- Cutting parts with a true angle up to +/- 60 degrees with continuous rotation.
- Patented Technology to reduce cutting time significantly.
- Complex 5-Axis Programming made easy and quick to learn.
- Surface Scanner to maintain constant distance between nozzle and workpiece when cutting uneven slabs.
- Positioning accuracy to ± 0.1 degrees.
- Multi-pass cutting for edges with different angle.
- Taper cutting automatic compensation.

Full range of options available on the website

www.techniwaterjet.com - sales@techniwaterjet.com

